

CONTRACT—A2 Bean Interchange Water Main Grouting

CLIENT—Thorne Civil Engineering **DATE— Mar 2021**


SCOPE—Grouting redundant water main

**Kent & Sussex
Geotechnical**

Kent & Sussex Geotechnical were employed by Thorne Civil Engineering to undertake grouting of a redundant water main.

The works were undertaken within roadworks at the side of the carriageway at the A2 Bean interchange to fill 300m of redundant 4" cast iron water main.

After mobilising our specialist grout pump, grout was batched on site using bagged products and injected directly into the water main. On site testing allowed grout to be measured for consistency. Approximately 2.5m^3 of grout was injected, works completed within a single shift.

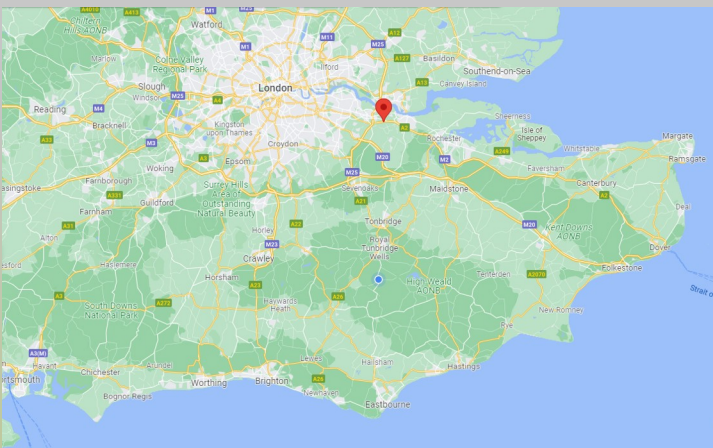

Thorne
Civil Engineers

Geotechnical & Geo-environmental Engineering

info@ksgeo.co.uk

www.ksgeo.co.uk